



Kit 1366

MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07



MINI Cooper (Mk.II), 3-dr Hatchback, 07-14 / *08-14

*North America



**480R
754**



480



750



THULE[®]
SWEDEN











				
				
				
				
				
				

Diagram illustrating the assembly of the robot kit components:



- 659 x 4**: Four L-shaped corner brackets.
- 182 x 4**: Four long, thin rectangular strips.
- 50993 x 2**: Two rectangular plates with four screws each.
- RR, FR, FL, RL**: Four directional sensors (RR, FR, FL, RL) arranged in a 2x2 grid, labeled **x 1**.

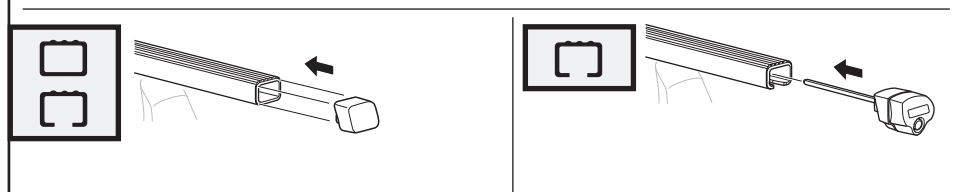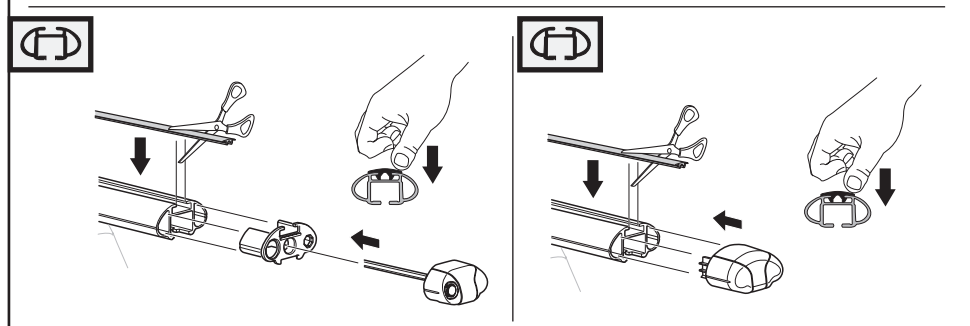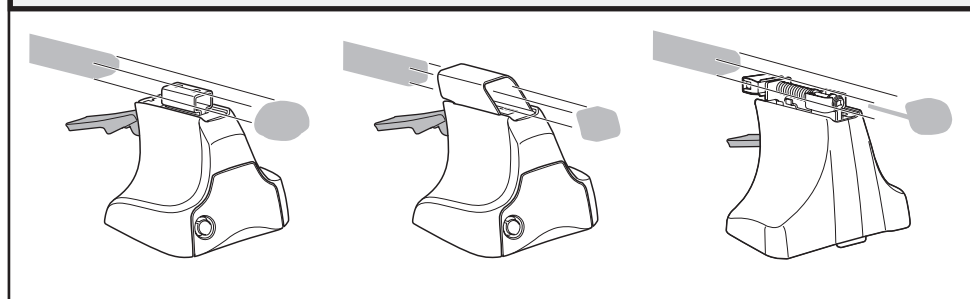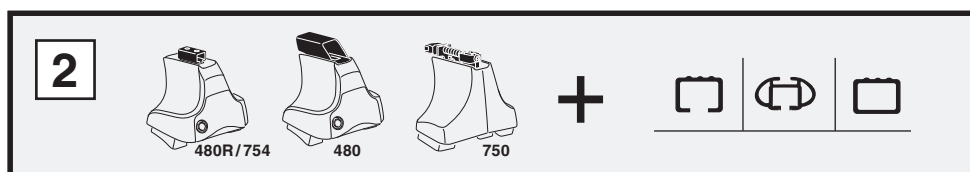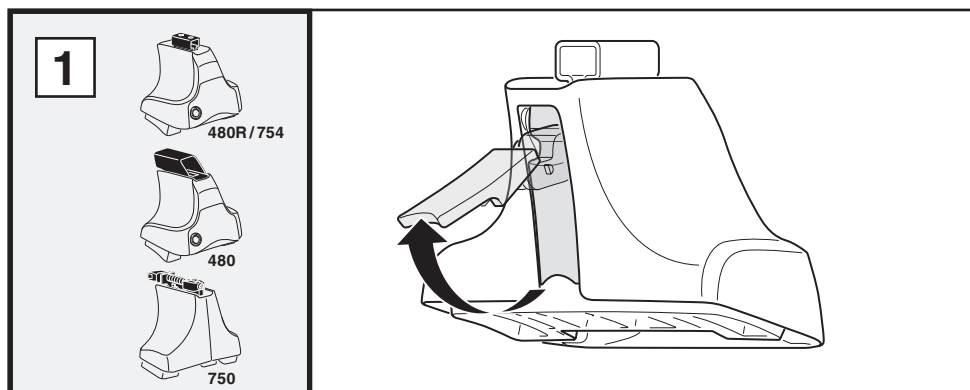

3





754



750



1




2



	X
MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07	31
MINI Cooper (Mk.II), 3-dr Hatchback, 07-14 / *08-14	28

1




2



	Y
MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07	32
MINI Cooper (Mk.II), 3-dr Hatchback, 07-14 / *08-14	32




480R




480

1




2




	X inch	X mm
MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07	37 ⁷ / ₈ "	961 mm
MINI Cooper (Mk.II), 3-dr Hatchback, 07-14 / *08-14	36 ⁵ / ₈ "	931 mm

1









2




	Y inch	Y mm
MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07	38 ¹ / ₄ "	971 mm
MINI Cooper (Mk.II), 3-dr Hatchback, 07-14 / *08-14	38 ¹ / ₄ "	971 mm

4








MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07
MINI Cooper (Mk.II), 3-dr Hatchback, 07-14 / *08-14

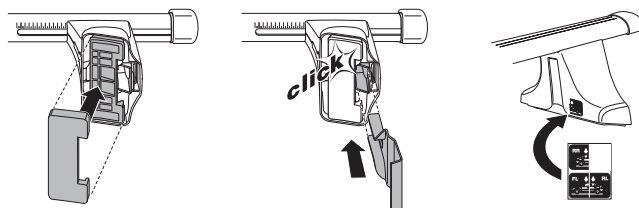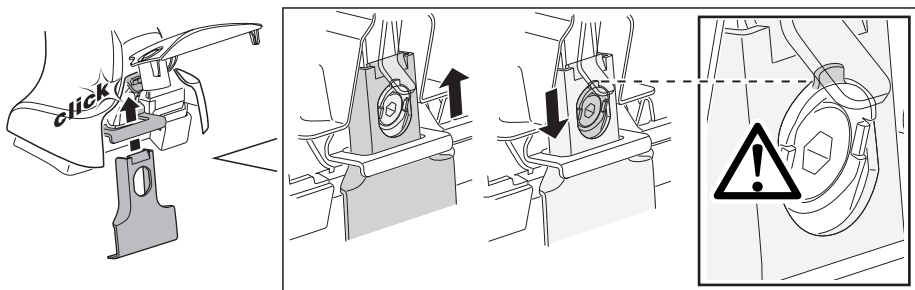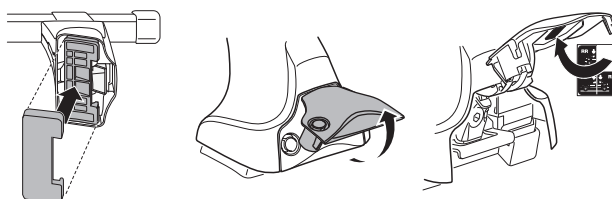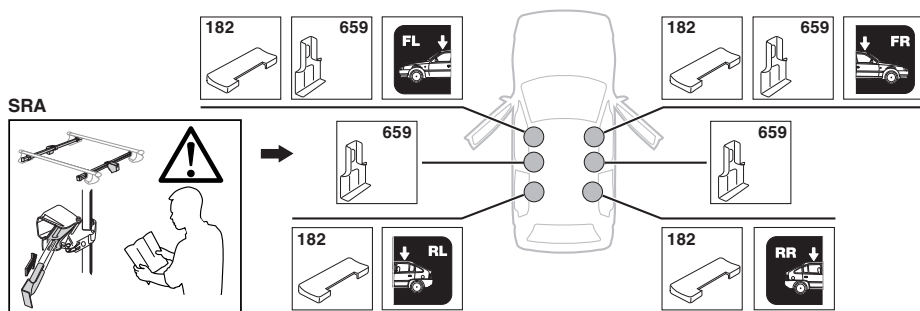

5

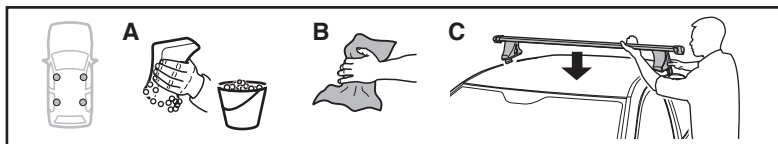

	X mm	Y mm	X inch	Y inch
MINI Cooper (Mk.I), 3-dr Hatchback, 01-06 / *03-07	110 mm	700 mm	4 ³ / ₈ "	27 ¹ / ₂ "
MINI Cooper (Mk.II), 3-dr Hatchback, 07-14 / *08-14	110 mm	700 mm	4 ³ / ₈ "	27 ¹ / ₂ "

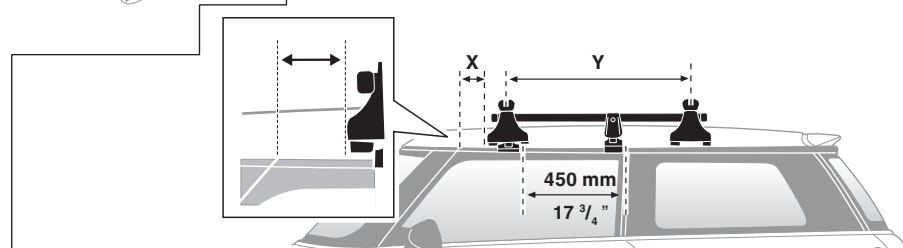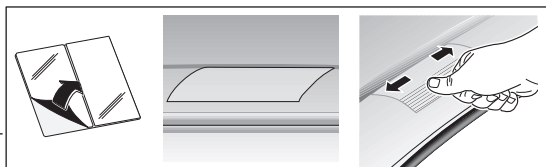

GB/US Tighten alternately
D Die Schrauben abwechselnd anziehen
F Serrer alternativement chaque côté
NL Afwisselend aan de linker- en de rechterkant aandraaien
I Alternare il serraggio delle viti
E Apretar alternativamente
PT Aperte alternadamente
S Dra át växelvis
FIN Kierrä vuorotellen
EST Pinguldage vaheldumisi
LAT Pievelciēt pamišus
LIT Užsukinėkite pakaitomis
PL Śruby dokręcaj naprzemiennie
RU Затягивайте попеременно

CZ Pokrétla bagazníka dokręcaj dokręcaj naprzemiennie.
SK Dofahujte striedavo
SLO Privijajte izmenično.
HR Naizmjenično zategnite
HU Egyarástól függetlenül szorítandó
GR Σφιγγετε εναλλάξ
TR Dönüşümlü sıkın
中文 交替拧紧
한국어 번갈아 가며 조이십시오.
日本語 交互に締め付けてください。
ไทย ชั้นแบบสลับ









6











480R/754








480

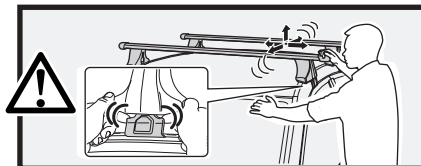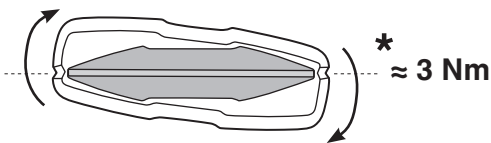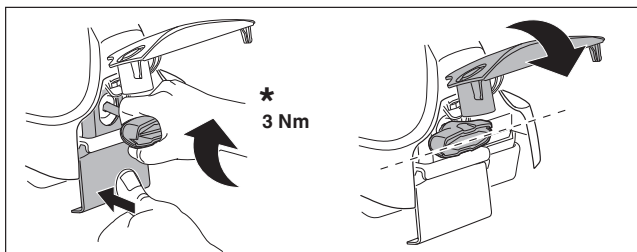

7



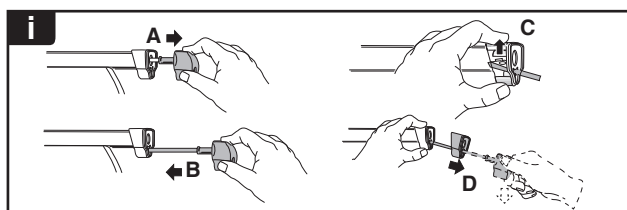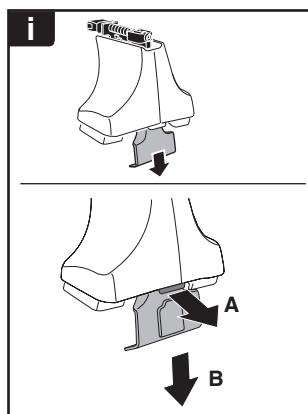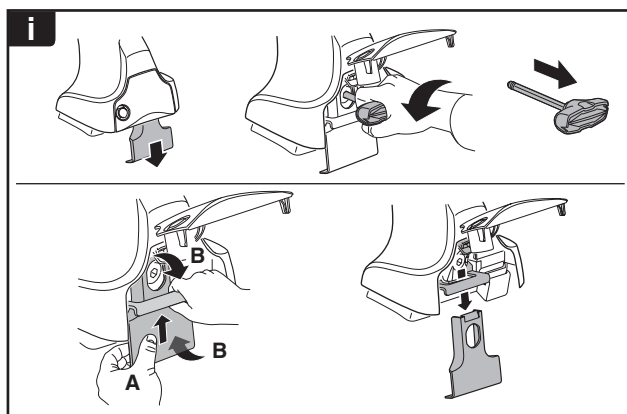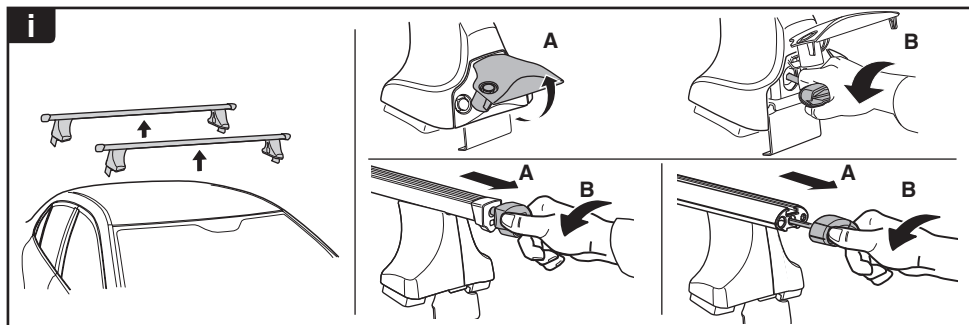

THULE®
SWEDEN

**ONE
KEY
SYSTEM**

		544 (x4)
		596 (x6)
		588 (x8)
NA		510 (x10)
EUR		452 (x12)
ASIA		